



TRANSUPPLY

Transportation Supply LLC
1401 Lavaca Street #40, Austin, TX 78701
(866) 930-4604 | sales@trans-supply.com | www.trans-supply.com

TRAFFIX ALERT[®]

HIGH SPEED

RUMBLE STRIP

Alerting Drivers with Sight, Sound and Sensation Awareness



Protecting workers and drivers in the construction work zone



Designed for High Speed Roadways



Safe with Motorcycles



Performs in Dry and Wet Conditions

- Insignificant movement at high speeds
- Highly visible on concrete and asphalt
- Designed for roadways with speed limits of 40+ mph (65+ kph)
- Provides increased driver awareness of upcoming conditions and compliance with a unique contrasting color
- Traffix Alert High Speed is especially targeted at drivers who are inattentive, fatigued or impaired
- 12" wide x 3/4" tall x 66" long sections link via a jigsaw connection
- Two connected 66" sections cover an entire lane width of 11' (132")
- Conforms to road surface



Also available in all orange and all black



Chalk outline indicates insignificant movement observed after repeated roll over and braking

Construction:

- Forged Steel & Aluminum Segments
- High Traction Urethane Tread
- Secure Jigsaw Connection
- Marine Grade Galvanized Wire Rope
- Stainless Steel Spacers

Dimensions:

- Section: 66" long x 12" wide x 3/4" tall (1.68m x 0.3m x 0.02m)
- Strip: 132" long x 12" wide x 3/4" tall (3.35m x 0.3m x 0.02m)

Components:

- 1 Section = 75 lbs (34 kg) (2 required)
- 1 Strip = 150 lbs (68 kg)

PRODUCT BULLETIN

TRAFFIX ALERT®

HIGH SPEED

RUMBLE STRIP

Alerting Drivers with Sight, Sound and Sensation Awareness



Contrasting color segments stand out on all road surfaces



Neatly stacks for storage and transport, urethane bottom secures placement



Safe with motorcycles

TRAFFIX ALERT® HIGH SPEED RUMBLE STRIP

Specification:



Portable rumble strip to be made of steel and aluminum segments, tapered on leading and trailing edges, with a high traction urethane treaded bottom surface. The segments will be linked with marine grade galvanized wire rope. The spacers between the segments will be stainless steel. Each Section will be 5.5 feet long, (1.7 meters) and will have a jigsaw connection on one end so that two sections can be connected to create a Strip, 11 feet long, (3.4 meters). One Strip will cover an 11 foot lane width. Alternating segments on a section will be a contrasting color, (Black/Steel, Silver/Aluminum), except for the jigsaw connection segment. The purpose of the contrasting color is to create a highly visible appearance to the driver, whether installed on concrete or asphalt roadways. The aluminum and steel segments will have a textured surface to maximize grip.

Each section will weigh approximately 75 lbs, (34 kg) and include a handle segment at each end for manual carry and deployment. Each strip will weigh approximately 150 lbs, (68 kg). Height of the rumble strip is not to exceed 3/4", (19 millimeters). Width of the rumble strip is 12.5", (0.3 meters).

3 Strips will be used to create an array, (set) of rumble strips to be laid on the roadway prior to the work zone to alert distracted drivers to the upcoming construction work zone or change in traffic conditions. The placement and spacing of arrays, (sets) is determined by the local road authorities.

SECTION	
WEIGHT:	75 lbs. [34 kg]
HEIGHT:	0.75 inch [0.02 m]
LENGTH:	5.5 feet [1.7 m]
WIDTH:	12 inches [0.3 m]
SEGMENTS:	20
MATERIAL:	textured steel, textured alum, urethane, stainless steel, galv. rope cable

STRIP	
WEIGHT:	150 lbs. [68 kg]
HEIGHT:	0.75 inch [0.02 m]
LENGTH:	11 feet [3.4 m]
WIDTH:	12 inches [0.3 m]
SEGMENTS:	40
MATERIAL:	textured steel, textured alum, urethane, stainless steel, galv. rope cable

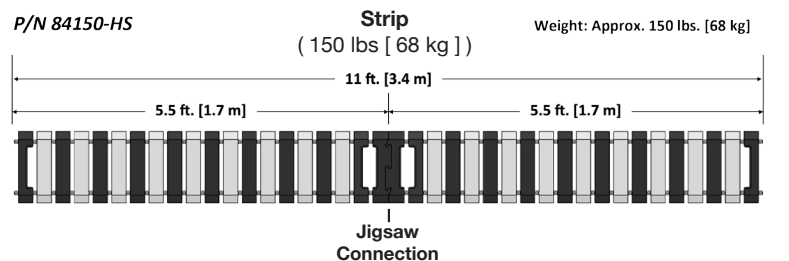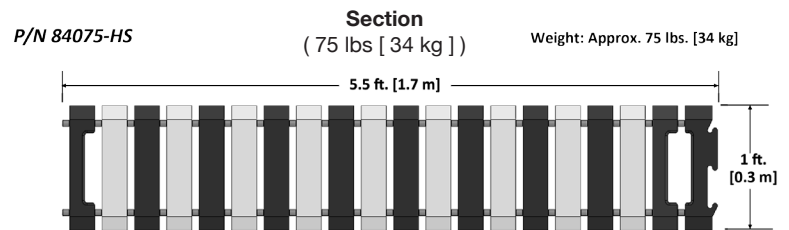

Easy Grip Handle



Jigsaw Connection locks firmly in place keeping Strips securely connected

Distributed by:



Transportation Supply LLC

1401 Lavaca Street #40, Austin, TX 78701

(866) 930-4604 | sales@trans-supply.com | www.trans-supply.com