

ENVIRO-CONE®



Made in the USA means a reliable, consistent and sustainable source of supply for distributors and users throughout North America.

Recyclable

BULLETII

PRODUC

- The Enviro-Cone® is 80% recycled by weight and can be recycled again. No more land fills loaded with toxic PVC cones. Enviro-Cone also qualifies for Green Points due to its high recycled content.
- If ever a stem gets destroyed, simply reorder the stem and reuse the base. No need to buy the entire cone.

Cold & Hot Weather Performance

- Manufactured from low density polyethylene, the Enviro-Cone provides superior cold weather performance.
 No cracking or breaking down to -40°F.
- No more soft and droopy cones in hot weather. The Enviro-Cone stands tall and vertical in road temperatures exceeding 180°F.

Stock # 16028-HIWB-7 28" Tall, 7 lb. with (6"& 4") reflective collars. MUTCD Compliant

Gription

 The Easy Grip Groove provides excellent "gription" for quick deployment and retrieval. Also makes tying off caution tape to cone quick and easy.

Visibility

 Quality 3M reflective collars assure superior performance in low light and nighttime conditions.

Durability

 Enviro-Cone provides long term durability. Color retention is excellent through the use of ultraviolet stabilizers and low density polyethylene (LDPE) increases the life of the product.

Stability

 With nearly 80% of the weight in the base, the Enviro-Cone is more stable than traditional 7 or 10 lb. PVC cones.

Complete Enviro-Cone Family

• Available in 18, 28 and 36 inches. Cone weights of 3, 7, 10 or 12 lbs. All sizes available in lime and white.



18", 3# 28", 7# 28", 10# 28", 12# 36", 10# 36", 12# 36", 12# 36", 12# 28", 10# 28",

ENVIRO-CONE®





simply reshape




Drop base over stem and reuse

Tire impact

Enviro-Cone® Specification

Orange traffic cone shall be 28" in height and have a total weight of 7 lbs. +/- .25 lbs. Stem of the cone shall be molded from LDPE to provide superior cold/hot weather performance, excellent 100% UV resistance/color retention, and superior impact performance. Base of the cone shall be molded from recycled rubber and make up approximately 80% of the total weight. Dimensions of the base are to be 15 3/4"x15 3/4". Cone base shall be removable so that the stem can be replaced. Base will lock onto the stem with molded-in locking lugs on the stem. The stem of the cone shall have recesses for reflective collars and a groove near the top of the cone for easy gription. Tipping angle of the cone shall be no less than 76° from vertical. The stem and base of the traffic cone shall be made in the USA.

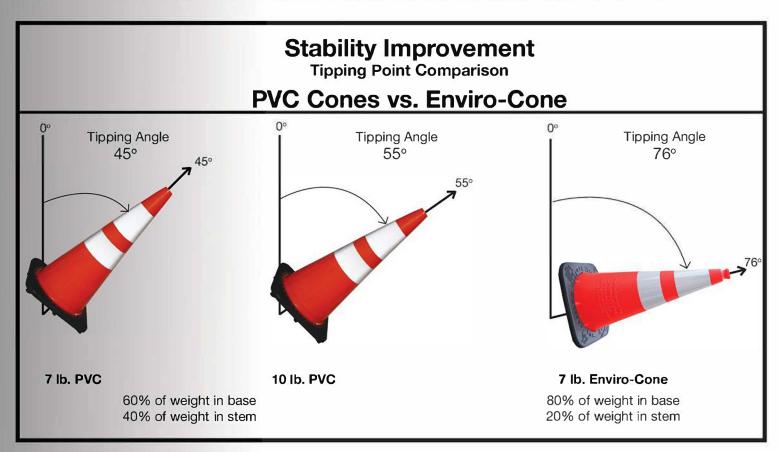

Distributed by:



Transportation Supply LLC 1401 Lavaca Street #40 Austin, TX 78701 Phone: (866) 930-4604 Email: sales@trans-supply.com www.trans-supply.com